
# **Data Sheet**

## NPL-Series - Valve Regulated Lead Acid Batter

### NPL100-12 (FR)

SPECIFICATIONS			
Nominal voltage	12	V	
20-hr rate Capacity to 10.5V at 20°C	12	Ah	
10-hr rate Capacity to 10.8V at 20°C			
	88	Ah	
DIMENSIONS	407 ( 0 7)		
Length Width	407 (±0.7)	mm	
	172 (±0.5) 240 (±0.7)	mm	
Height (height over terminals)	240 (±0.7) N/A	mm	
Mass (typical)	39.0	mm	
	39.0	kg	
Post type terminal	10	mm	
	16.5	Nm	
Torque OPERATING TEMPERATURE RANGE	10.5	INIT	
	20%0 tr	- 150°C	
Storage (in fully charged condition)	-20°C to +50°C		
Charge		-15°C to +50°C -20°C to +60°C	
Discharge STORAGE	-20°C to		
Capacity loss per month at 20°C (approx)	3	%	
CASE MATERIAL	3	70	
Standard Option	ABS (UL.94:HB)		
Flame retardant option (FR)	ABS (U	ABS (UL94:V0)	
CHARGE VOLTAGE	40.05 ( . 40( )		
Float charge voltage at 20°C	13.65 (±1%) 2.275 (±1%)	V V/cell	
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C	
Cyclic (or Boost) charge at 20°C	14.5 (±3%) 2.42 (±3%)	V V/cell	
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C	
CHARGE CURRENT			
Float charge current limit	No limit	А	
Cyclic (or Boost) charge current limit	25.00	А	
MAXIMUM DISCHARGE CURRENT			
1 second	1000	А	
1 minute	500	А	
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE			
(according to EN IEC 60896-21)			
Internal resistance	N/A	mΩ	
Short-Circuit current	N/A	A	
IMPEDANCE			
Measured at 1 kHz	4	mΩ	
PERFORMANCE & CHARACTERISTICS			
Refer to the technical manual	NPL		
DESIGN LIFE			
EUROBAT Classification: High performance	10 to 12	years	
Yuasa design life @ 20°C	up to 10	years	
SAFETY			



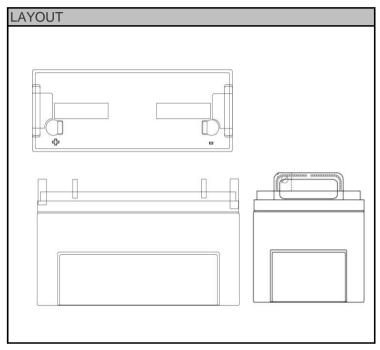

#### **3RD PARTY CERTIFICATIONS**

ISO 9001 - Quality Management Systems ISO 14001 - Environmental Management Systems EN 18001 - OHSAS Management Systems UNDERWRITERS LABORATORIES Inc.



#### STANDARDS

IEC61056 IEC60896-21/22







#### Installation

Can be installed and operated in any orientation except permanently inverted

#### Handles

Batteries must not be suspended by their handles (where fitted)

#### Vent valves

Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

#### Gas Release

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

#### Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations





ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.2 / Issue Date: March 2011



YUASA BATTERY SALES UK LTD. Unit 13, Hunts Rise South Marston Industrial Estate Swindon SN3 4TG ASA

www.yuasaeurope.com	NPL	