



Sprinter P12V2130 data sheet



Drawing:

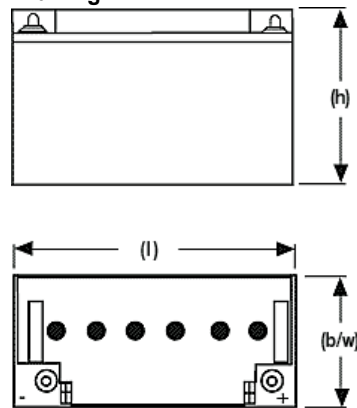

Terminal:



Specifications:

Exide type designation	Part number	Nom. Voltage V	Nominal capacity C ₁₀ 1.80Vpc 25°C Ah	Power 15min 1.60 Vpc 25°C W	Length l max. mm	Width b/w max. mm	Height h1 max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Max. perm current 5 secs. A	Terminal
P12V2130	NAPW122130HP0MA	12	86	2130	359.0	172.0	226.0	33.00	6	2180	2130	M-M8

Part numbers not valid for North America, use type for ordering!

Constant-current discharge in A (@ 25 °C):

Part number	Exide type designation	VpC	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	5h	8h	10h	20h
NAPW122130HP0MA	P12V2130	1.95	158.0	149.0	126.0	103.0	88.0	69.0	50.8	41.0	23.2	17.1	11.3	7.6	6.6	3.5
NAPW122130HP0MA	P12V2130	1.90	248.0	220.0	164.0	128.0	107.0	81.0	60.0	48.3	28.5	20.7	13.8	9.1	7.6	4.1
NAPW122130HP0MA	P12V2130	1.85	328.0	273.0	195.0	152.0	124.0	91.0	67.0	53.5	32.0	23.3	14.8	9.8	8.2	4.4
NAPW122130HP0MA	P12V2130	1.80	380.0	313.0	215.0	164.0	134.0	98.0	71.0	56.3	33.5	24.4	15.6	10.4	8.6	4.6
NAPW122130HP0MA	P12V2130	1.75	419.0	338.0	231.0	177.0	142.0	104.0	73.6	58.9	34.6	25.4	16.3	10.7	8.8	4.7
NAPW122130HP0MA	P12V2130	1.70	456.0	360.0	243.0	183.0	147.0	106.6	75.6	60.9	35.4	26.2	16.8	10.9	9.0	4.8
NAPW122130HP0MA	P12V2130	1.65	485.0	380.0	253.0	189.0	151.0	109.6	77.6	61.6	35.9	26.6	17.0	11.0	9.0	4.8
NAPW122130HP0MA	P12V2130	1.60	510.0	398.0	262.0	194.0	154.0	111.7	79.2	62.1	36.2	26.8	17.0	11.0	9.0	4.8

Constant-power discharge in W/block (@ 25 °C):

Part number	Exide type designation	VpC	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	5h	8h	10h
NAPW122130HP0MA	P12V 2130	1.90	2964	2578	1907	1517	1270	963.2	712.5	583.6	338.0	245.6	166.5	109.6	91.4
NAPW122130HP0MA	P12V 2130	1.85	3680	3085	2224	1752	1445	1065	771.4	635.4	379.6	277.1	176.6	117.7	98.5
NAPW122130HP0MA	P12V 2130	1.80	4172	3444	2440	1896	1558	1137	820.1	671.9	396.9	289.3	186.8	122.8	102.5
NAPW122130HP0MA	P12V 2130	1.75	4510	3690	2593	2009	1637	1199	868.8	702.4	406.0	296.4	191.8	124.8	103.5
NAPW122130HP0MA	P12V 2130	1.70	4798	3895	2695	2060	1677	1220	886.1	717.6	412.1	301.5	194.9	126.9	104.5
NAPW122130HP0MA	P12V 2130	1.65	5054	4060	2756	2102	1698	1240	896.2	723.7	417.2	305.5	196.9	127.9	105.6
NAPW122130HP0MA	P12V 2130	1.60	5258	4192	2810	2130	1715	1250	901.3	727.8	420.2	307.5	197.9	127.9	105.6